

TMT MIDI 4

LESS IS MORE

cULusE491014CERoHSMADE IN TÜRKİYECRI 80SMD						cULusE491014CERoHSMADE IN TÜRKİYECRI 80SMD					
WARRANTY	INGRESS PROTECTION	AVAILABLE CCT & COLORS	TYPICAL EFFICIENCY	POWER CONSUMPTION	INPUT VOLTAGE	INPUT VOLTAGE	POWER CONSUMPTION	TYPICAL EFFICIENCY	AVAILABLE CCT & COLORS	INGRESS PROTECTION	WARRANTY
5 YEAR	IP67	<div><div></div><div></div><div></div></div> <div>10.000K6.500K3.000K</div>	159 LM/W	1,7-3.5 W	12-24 V	12-24 V	1,7-3.5 W	159 LM/W	<div><div></div><div></div><div></div></div> <div>10.000K6.500K3.000K</div>	IP67	5 YEAR

TMT MIDI 4

LESS IS MORE

OPERATING TEMPERATURE -30°C - +60°C	LEAD WIRE TIN COATED COPPER WIRE
STORAGE TEMPERATURE -30°C - +60°C	LIFE TIME TM21 >60.000 HOURS
BODY MATERIAL CASE: ABS OPTICS: OPTICAL PC	ADHESIVE TAPE 3M FOAM™
FINISHING ULTRASONIC WELDING	STRIP SIZE 50 MODULES / STRIP

PACKAGING DETAILS

CHAIN / STRIP
25 PCS 12V
50 PCS 24V

2 CHAIN 12V
1 CHAIN 24V

BAG
50 PCS

20 BAG

BOX
1.000 PCS

Powerfully Efficient. Exceptionally Bright.

Introducing the all-new **TMT MIDI 4** a revolutionary module engineered with efficiency at its core. Featuring advanced CrystaLens optics with a wide 170° beam angle, this powerful module delivers bright, uniform illumination across large surfaces, dramatically reducing the number of modules required and eliminating hotspots.

Thanks to its high-performance circuit design, the **TMT MIDI 4** outshines every competitor in its class. You can achieve the same level of brightness using three times fewer modules, while cutting energy consumption by **up to 30%**. It's the ultimate solution for large channel letters, sign cabinets, and fluorescent retrofit projects.

Fewer modules. Lower power. Maximum impact. Less Cost.


TMT Midi 4 redefines what's possible in LED signage lighting

FEATURES


- ✓ CABLE HIDING TECHNOLOGY
- ✓ EFFICIENT CIRCUIT DESIGN
- ✓ CLEAN WHITE TECHNOLOGY
- ✓ PERFECT FOR LARGE CHANNEL LETTERS AND SIGN CABINETS
- ✓ WHEN INSTALLED 3" - 10" FROM THE FACE
- ✓ UP TO 159 LUMENS PER WATT

APPLICATIONS

- ✓ IDEAL FOR LARGE CHANNEL LETTERS WITH DEPTHS OF 3" TO 10"
- ✓ PERFECT FOR SIGN CABINETS WITH INSTALLATION DEPTHS OF 2" TO 10" FROM SIGN FACE
- ✓ STROKE IS 3X THE DEPTH OF SIGN

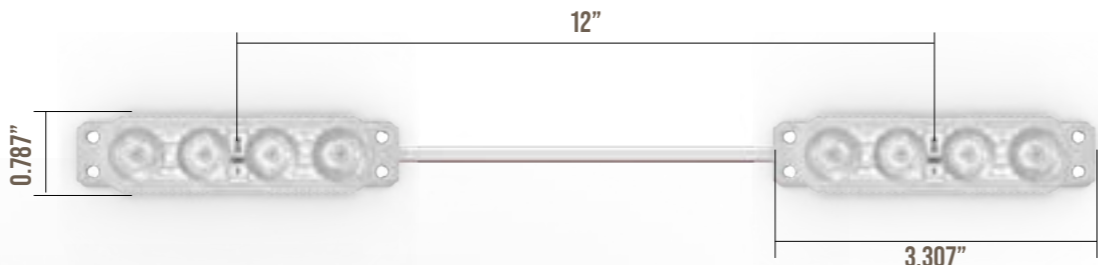

BEAM ANGLE

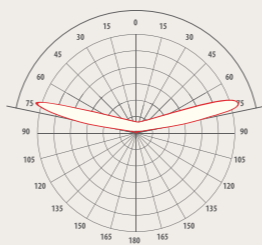

170°

PRODUCT MODELS						DETAILED INFORMATION					DENSITY GUIDE																					
		CCT / COLOR	ORDER CODE	INPUT	LUMEN	EFFICIENCY	C2C	60W PS LOAD	MODULE / FOOT	LUMEN / FOOT	WATT / FOOT	LETTER DEPTH																	DIMENSIONS ARE IN INCHES			
		CCT / COLOR	ORDER CODE	INPUT	LUMEN	EFFICIENCY	C2C	60W PS LOAD	MODULE / FOOT	LUMEN / FOOT	WATT / FOOT	2"	2.5"	3"	3.5"	4"	4.5"	5"	5.5"	6"	6.5"	7"	7.5"	8"	8.5"	9"	9.5"	10"	10"			
1.7 W	6.500K	TMT-105729		12V	270 LM	159 LM/W	12"	30 PCS	1 PCS	270 LM	1.7 W		7.5	9	10.5	12	12	12	12	12	12	12	12	12	12	12	12	12	12			
	10.000K	TMT-106166		12V	300 LM	150 LM/W	12"	25 PCS	1 PCS	300 LM	2 W																					
2 W	8.000K	TMT-107640		12V	300 LM	150 LM/W	12"	25 PCS	1 PCS	300 LM	2 W																					
	6.500K	TMT-105919		12V	300 LM	150 LM/W	12"	25 PCS	1 PCS	300 LM	2 W																					
	3.000K	TMT-106167		12V	280 LM	140 LM/W	12"	25 PCS	1 PCS	280 LM	2 W																					
	RED	TMT-107101		12V	88 LM	44 LM/W	12"	25 PCS	1 PCS	88 LM	2 W																					
	6.500K	TMT-105813		24V	300 LM	150 LM/W	12"	25 PCS	1 PCS	300 LM	2 W																					
3.5 W	6.500K	TMT-107377		24V	570 LM	163 LM/W	12"	16 PCS	1 PCS	570 LM	3.5 W					9	10.5	12	12	12	12	12	12	12	12	12	12	12	12			



MIDI STICKS
COMPATIBLE